
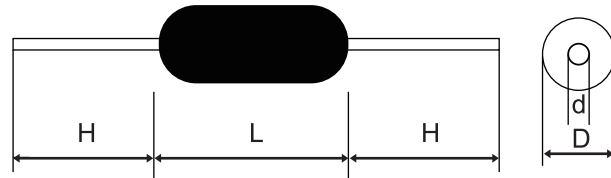


電阻器套熱縮套管

● 特點

- 耐壓、絕緣、耐高溫性能
- Withs tand voltage-insulation-tepperature resistance
- 防爆和阻燃的作用
- The function of explosion proof and flame retardant



● 規格 Specifications

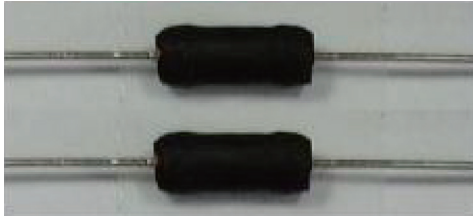

種類 Type		尺寸 Dimensions (mm)			
標準品	小型品	L	ΦD	Φd	H
1/2W	1WS	10.5±1.5	4.0±0.5	0.80±0.10	28.0±3.0
1W	2WS	12.5±1.5	5.0±0.5	0.80±0.10	30.0±3.0
2W	3WS	16.5±1.5	5.7±0.5	0.80±0.10	33.0±3.0
3W	5WS	18.5±1.5	6.5±1.0	0.80±0.10	33.0±3.0

備註：以上尺寸可供參考，套熱縮管尺寸可依客戶要求協商訂制，1/2W~2WS 可生產T52/T63編帶（限套本體）


● FNN型 FNN Type

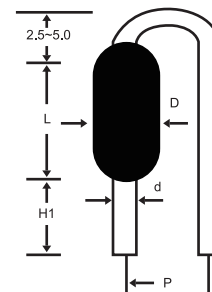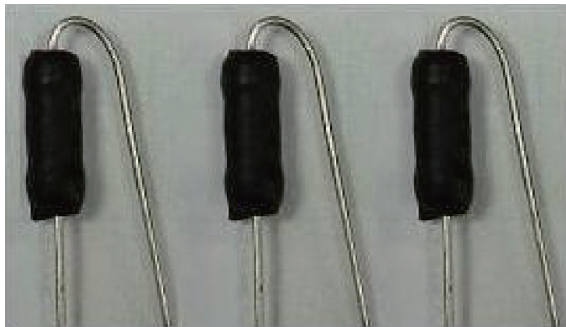

種類 Type		尺寸 Dimensions (mm)				
標準品	小型品	L	ΦD	Φd	H1	P
1/2W	1WS	10.5±1.5	4.0±0.5	0.80±0.10	40±1.0/7.5±2.0	6.5±2.0
1W	2WS	12.5±1.5	5.0±0.5	0.80±0.10	7.5±2.0	10.0±2.0
2W	3WS	16.5±1.5	5.7±0.5	0.80±0.10	7.5±2.0	10.0±2.0
3W	5WS	18.5±1.5	6.5±1.0	0.80±0.10	10.0±2.0	10.0±2.0

備註：以上尺寸可供參考，套熱縮管尺寸可依客戶要求協商訂制

● 套管產品式樣及尺寸見圖 See the pattern and Size of the casing products

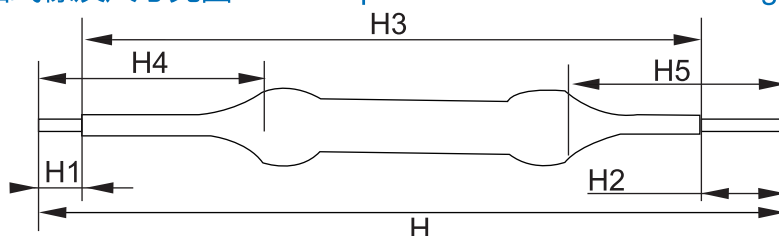

PS:H1&H2尺寸引線裸露部位及H3套熱縮管尺寸和H4&H5兩端引線長可根據客戶要求協商定制

PS:lead exposed parts and H3 H1 and H2 Size set of heat shrinkable tube size and H4 ends & H5 lead long to negotiate customized according to customer requirements.